



LedKoning

HELDER WIT BASIC LED STRIP

60
LEDS P/M



Helder Wit






SPECIFICATIES


Dimbaar	Ja		
3M plakstrip over gehele lengte	Ja		
Garantie	2 jaar		
Op maat te knippen	12V: Elke 5 cm	24V: Elke 10 cm	
Aantal LED's p/m	60		
Type LED	3528 SMD		
Merk LED	Epistar		
Stralingshoek	120 graden		
Kleur	Helder Wit		
Kleurtemperatuur (Kelvin)	4000K		
CRI	82.0		
Lichtsterkte (lumen) p/m	421.4 lm		
Aantal branduren	50.000		
Voltage (DC)	12V of 24V		
Watt - vermogen p/m	4.33W		
Lumen per Watt	97.32		
Watt per LED	0,072		
Bescherming	IP20, IP65 of IP67		
Materiaal waterdichte bescherming (IP65/IP67)	Siliconen		
Achtergrond kleur strip (PCB)	Wit		
Plakstrip	IP20: 3M 300LSE	IP65: 3M VHB	P67: 3M VHB
Breedte led strip	IP20: 8mm	IP65: 10mm	IP67: 10mm
Dikte led strip	IP20: 3mm	IP65: 6mm	IP67: 6mm
Aansluiting begin	5.5x2.1 DC stekker type vrouw 2-pins stekker type vrouw+man		
Aansluiting einde	2-pins stekker type vrouw		

TECHNISCHE TEKENINGEN


IP20 12V

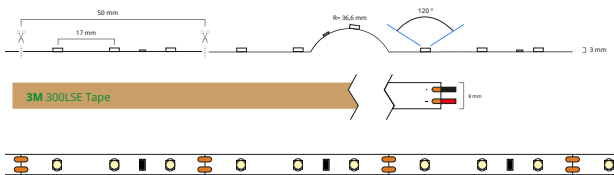


IP65/67 12V

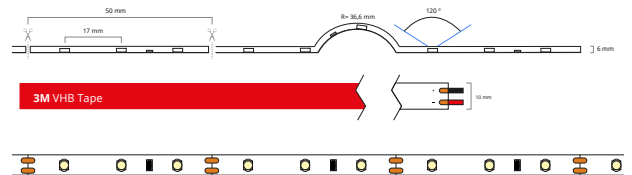

IP20 24V

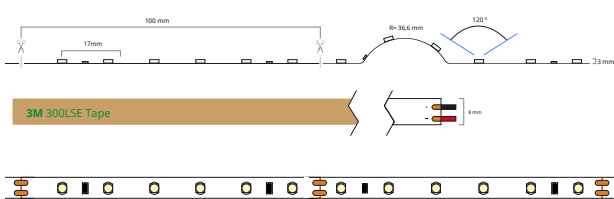

IP65/67 24V

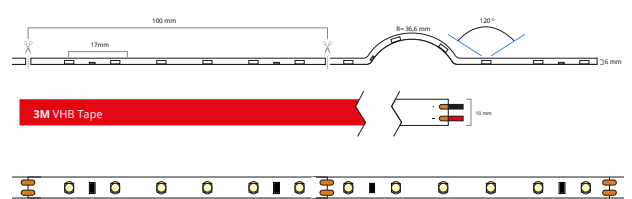

IP20



IP65




IP67





1M HELDER WIT BASIC - 60 LEDS P/M

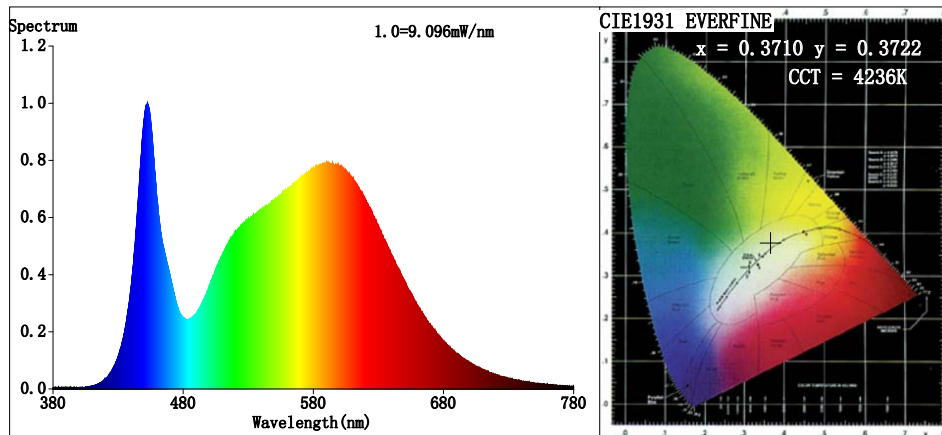

Color Parameters:

Chromaticity Coordinate: $x=0.3710$ $y=0.3722$ / $u'=0.2207$ $v'=0.4981$

CCT=4236K (Duv=0.0007) Dominant WL:Ld =577.7nm Purity=23.0%

Ratio:R=17.5% G=78.8% B=3.8% Peak WL:Lp=452.6nm FWHM=22.0nm

Render Index:Ra=82.0

R1 =80 R2 =89 R3 =94 R4 =80 R5 =80 R6 =83 R7 =86

R8 =64 R9 =4 R10=72 R11=78 R12=57 R13=82 R14=97 R15=74

Photo Parameters:

Flux = 421.4 lm Eff. : 97.23 lm/W Fe = 1.271 W

Electrical parameters:

V = 11.999 V I = 0.3612 A P = 4.334 W PF = 1.000

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 1090 ms Ip = 38916 (59%)



AN TENG TESTING CERTIFICATION



WWW.ANTENGLAB.COM
Tel:86-755-27724522
Fax:86-755-27724533

Model : KWLS60-05M2465;HWLS120-01M1220;HWLS120-02M1220;HWLS120-03M1220;HWLS120-04M1220;HWLS120-05M1220,HWLS120-01M1265;HWLS120-02M1265;HWLS120-03M1265;HWLS120-04M1265;HWLS120-05M1265,HWLS120-01M2420;HWLS120-02M2420;HWLS120-03M2420;HWLS120-04M2420;HWLS120-05M2420,HWLS120-01M2465;HWLS120-02M2465;HWLS120-03M2465;HWLS120-04M2465;HWLS120-05M2465,HWLS60-01M1220;HWLS60-02M1220;HWLS60-03M1220;HWLS60-04M1220;HWLS60-05M1220,HWLS60-01M1265;HWLS60-02M1265;HWLS60-03M1265;HWLS60-04M1265;HWLS60-05M1265,HWLS60-01M2420;HWLS60-02M2420;HWLS60-03M2420;HWLS60-04M2420;HWLS60-05M2420,HWLS60-01M2465;HWLS60-02M2465;HWLS60-03M2465;HWLS60-04M2465;HWLS60-05M2465

Trademark : N/A

Sufficient samples of the product have been tested and found to be in conformity with

Test Standards	EN 55015: 2013+A1:2015 EN 61547: 2009 EN 61000-3-2:2014 EN 61000-3-3: 2013
-----------------------	---

When tested as specified, the submitted sample complies with EMC Directives 2014/30/EU
The certificate is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test laboratory logo.

CE

Authorized Signer: 

Joseph Yang / Manager
March 13, 2018

Shenzhen An-Teng Testing Service Co., Ltd.
Room715-722, Huafeng Yu'an Business Building, Yu'an 1st Road, Bao'an District, Shenzhen,Guangdong,China.

Adres: Rietveldenweg 49D, 5222AP 's Hertogenbosch
Tel: +3173 704 1100
E-mail: info@ledkoning.nl
Website: www.ledkoning.nl