



LedKoning

RGB PRO 120 LED STRIP

120
LEDS P/M



R **G** **B**






SPECIFICATIES


Dimbaar	Ja
3M plakstrip over gehele lengte	Ja
Garantie	2 jaar
Op maat te knippen	Elke 5 cm
Aantal LED's p/m	120
Type LED	5050 SMD
Merk LED	Epistar
Stralingshoek	120 graden
Kleur	RGB multicolor
Kleurtemperatuur (Kelvin)	-
CRI	-
Lichtsterkte (lumen) p/m	919 lm (R=208, G=568, B=140)
Aantal branduren	50.000
Voltage (DC)	24V
Watt - vermogen p/m	23,3W
Lumen per Watt	40 lm
Watt per LED	0,19W
Bescherming	IP20, IP65 of IP67
Materiaal waterdichte bescherming (IP65/IP67)	Siliconen
Achtergrond kleur strip (PCB)	Wit
Plakstrip	IP20: 3M 300LSE IP65: 3M VHB IP67: 3M VHB
Breedte led strip	IP20: 10mm IP65: 12mm IP67: 12mm
Dikte led strip	IP20: 3mm IP65: 4mm IP67: 4mm
Aansluiting begin	4-pins stekker type vrouw+man
Aansluiting einde	4-pins stekker type vrouw

TECHNISCHE TEKENINGEN

IP20

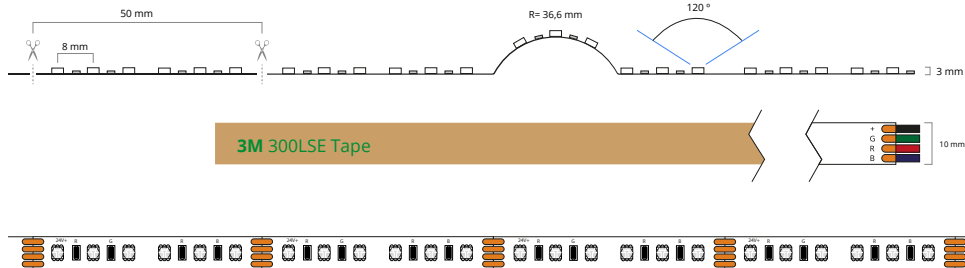

IP65/67

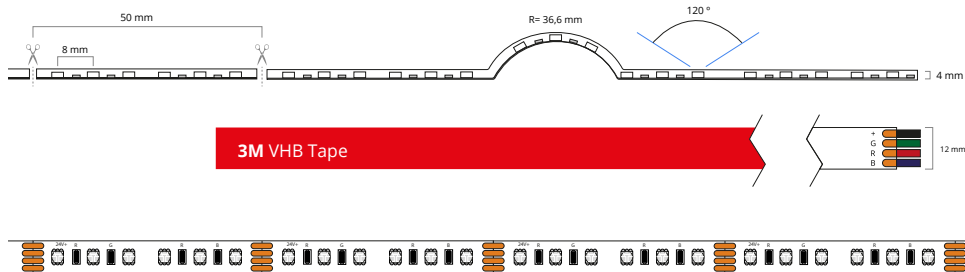

IP20



IP65




IP67





1M RGB Pro - 120 LEDS P/M

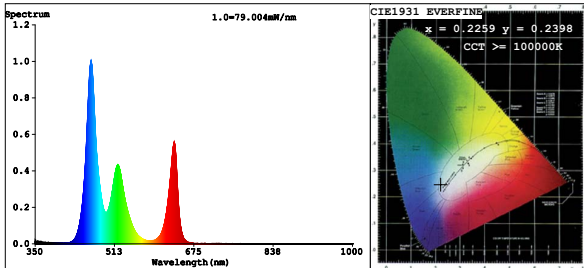


Color Parameters:
 Chromaticity Coordinate: $x=0.2259$ $y=0.2398/u'=0.1666$ $v'=0.3978$
 CCT=100000K (Duv=-0.0141) Dominant WL:Ld =479.3nm Purity=44.9%
 Ratio:R=18.6% G=66.5% B=15.0% Peak WL:Lp=464.5nm FWHM=22.0nm
 Render Index:Ra=55.1 CRI=49.9

R1 =46 R2 =60 R3 =71 R4 =67 R5 =66 R6 =61 R7 =58
 R8 =11 R9 =0 R10=5 R11=64 R12=64 R13=44 R14=80 R15=23

Photo Parameters:
 Flux = 919.1 lm Eff. : 39.67 lm/W Fe = 4.391 W

Electrical parameters:
 V = 23.997 V I = 0.9655 A P = 23.17 W PF = 1.000
 LEVEL:OUT WHITE:OUT

Status: Integral T = 43 ms Ip = 50660 (77%)

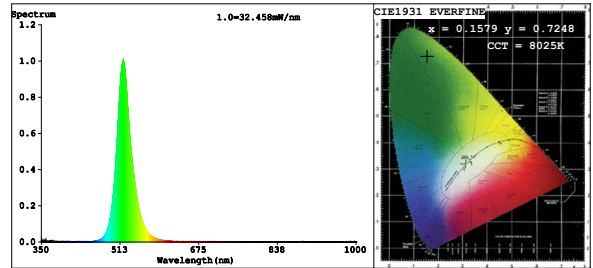


Color Parameters:
 Chromaticity Coordinate: $x=0.1579$ $y=0.7248/u'=0.0555$ $v'=0.5731$
 CCT=8025K (Duv=0.1608) Dominant WL:Ld =524.7nm Purity=79.3%
 Ratio:R=0.3% G=97.4% B=2.3% Peak WL:Lp=518.9nm FWHM=30.4nm
 Render Index:Ra=0.0 CRI=2.8

R1 =0 R2 =0 R3 =0 R4 =0 R5 =0 R6 =0 R7 =0
 R8 =0 R9 =0 R10=0 R11=0 R12=0 R13=0 R14=39 R15=0

Photo Parameters:
 Flux = 568.4 lm Eff. : 75.17 lm/W Fe = 1.197 W

Electrical parameters:
 V = 23.998 V I = 0.3151 A P = 7.562 W PF = 1.000
 LEVEL:OUT WHITE:OUT

Status: Integral T = 68 ms Ip = 39755 (61%)

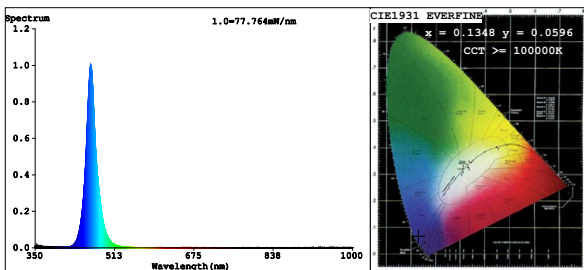


Color Parameters:
 Chromaticity Coordinate: $x=0.1348$ $y=0.0596/u'=0.1565$ $v'=0.1557$
 CCT=100000K (Duv=-0.1639) Dominant WL:Ld =468.3nm Purity=96.8%
 Ratio:R=0.3% G=15.8% B=83.9% Peak WL:Lp=463.8nm FWHM=21.1nm
 Render Index:Ra=0.3 CRI=0.2

R1 =0 R2 =0 R3 =0 R4 =0 R5 =2 R6 =0 R7 =0
 R8 =0 R9 =0 R10=0 R11=0 R12=0 R13=0 R14=0 R15=0

Photo Parameters:
 Flux = 139.8 lm Eff. : 17.93 lm/W Fe = 2.089 W

Electrical parameters:
 V = 23.998 V I = 0.3248 A P = 7.795 W PF = 1.000
 LEVEL:OUT WHITE:OUT

Status: Integral T = 43 ms Ip = 49683 (76%)

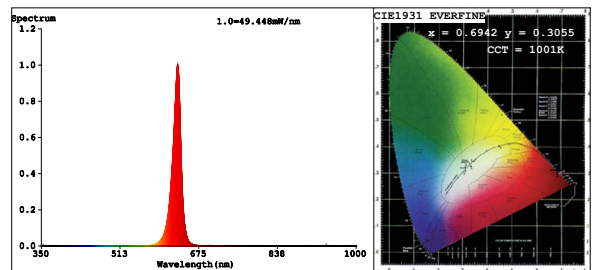

Color Parameters:
 Chromaticity Coordinate: $x=0.6942$ $y=0.3055/u'=0.5261$ $v'=0.5210$
 CCT=1001K (Duv=-0.0786) Dominant WL:Ld =621.5nm Purity=99.9%
 Ratio:R=95.4% G=4.6% B=0.0% Peak WL:Lp=631.8nm FWHM=17.3nm
 Render Index:Ra=27.9 CRI=33.3

R1 =9 R2 =78 R3 =33 R4 =0 R5 =4 R6 =90 R7 =9
 R8 =0 R9 =0 R10=72 R11=0 R12=79 R13=31 R14=61 R15=0

Photo Parameters:
 Flux = 207.5 lm Eff. : 28.09 lm/W Fe = 1.035 W

Electrical parameters:
 V = 23.998 V I = 0.3078 A P = 7.387 W PF = 1.000
 LEVEL:OUT WHITE:OUT

Status: Integral T = 68 ms Ip = 42894 (65%)



CE CERTIFICAAT



CE EMC TEST REPORT

For

5050 RGB LED Strip

Model No: RBLS30-1M1220(other in the model list)

Applicant : LedKoning
Rietveldeweg 49D, DEN BOSCH, The Netherlands.

Manufacturer : LedKoning
Rietveldeweg 49D, DEN BOSCH, The Netherlands.

Issued By : Shenzhen An-Xin Testing Service Co., Ltd.
Room 402-405, Floor 4th, Building C, Yuxing Technology
Industrial Park, Xixiang Street, Bao'an District, Shenzhen,
Guangdong, China

Tel : +86 755 23009643

Fax : +86 755 23009643

Report Number : AXJC2021080900349E

Issued Date : Aug. 12, 2021

Date of Report : Aug. 12, 2021



Note: This report shall not be reproduced except in full, without the written approval of Shenzhen An-Xin Testing Service Co., Ltd. This document may be altered or revised by Shenzhen An-Xin Testing Service Co., Ltd personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Shenzhen An-Xin Testing Service Co., Ltd.

Room 402-405, Floor 4th, Building C, Yuxing Technology Industrial Park, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

Adres: Rietveldeweg 49D, 5222AP 's Hertogenbosch
Tel: +3173 704 1100
E-mail: info@ledkoning.nl
Website: www.ledkoning.nl